Prior to installation, read these instructions.

1. General description

The Wc601 series is an automatic lifting station suitable for pumping domestic wastewater and sewage off places in private dwellings such as a cabinet, a washbasin or a toilet, where wastewater cannot be led directly to the sewer by means of a natural downward slope.


2. Technical data

Supply voltage: 220~240V/50Hz
Input power: 600 W
Speed: 2800 rpm
Rated current: 3 A
Insulation class: F
Protection class: IP 44
Max flow: 6.5 m^3/h
Max head: 8.5 m
Supply cable: 1.6m, 0.75mm^2 (H05VV-F-3G)
Net weight: 7.7 kgs
Start level: 90 mm above bottom
Stop level: 40 mm above bottom
Max liquid temperature: 50℃
Ambient temperature: +0℃ to +35℃
Duty: S3-50% - 1min.(30 sec.on; 30 sec.off)


3. Safety instructions

1). To ensure a normal and safe work of this product, please read this manual carefully before operation.
2). The product must be reliably earthed. For safety reason, installation of a leakage protection switch is required. Do not leave the plug wet when plugged in. Do not place the socket in wet locations.
3). Before carrying out any service work, switch off the power supply.
4). Power shall be supplied in accordance with the voltage and frequency marked on nameplate.


4. Product sizes

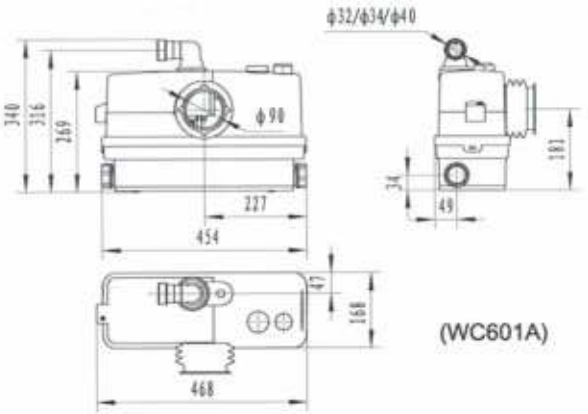

(WC601A)

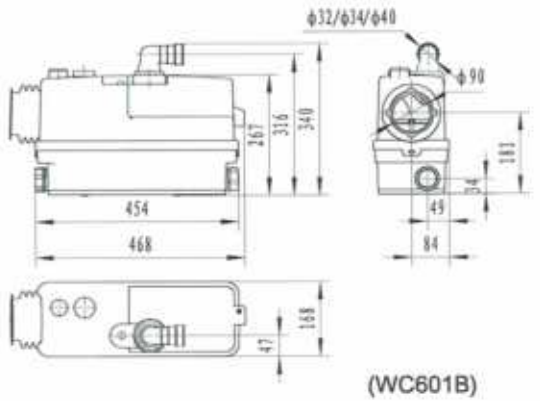

(WC601B)

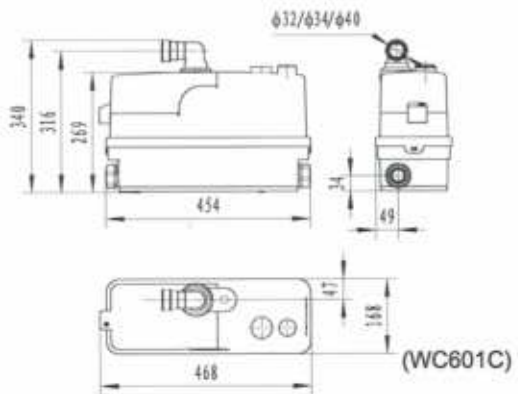

(WC601C)